



US

(12) **United States Patent**
Liang

(45) **Date of Patent:**

Apr. 2, 2002

(54) **BATTERY TERMINAL CONNECTOR**

(76) **Inventor:** ;

(*) **Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) **Appl. No.:** 09/737,575

(22) **Filed:** Dec. 18, 2000

(51) **Int. Cl.⁷** H01R 4/42

(52) **U.S. Cl.** 439/764; 439/462

(58) **Field of Search** 439/761-764,
439/461, 462, 202, 203, 504, 522

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,171,169	A	*	12/1992	Butcher et al.	439/755
5,190,485	A	*	3/1993	Ransdell	439/798
5,573,423	A	*	11/1996	Lin et al.	439/462
5,707,258	A	*	1/1998	Pilotti	439/763
5,877,609	A	*	3/1999	Carter	320/103
D-438,173	S	*	2/2001	Liang	D13/120

FOREIGN PATENT DOCUMENTS

JP 54007590 * 1/1979 439/805

* cited by examiner

Primary Examiner—Gary Paumen

Assistant Examiner—James R. Harvey

(74) *Attorney, Agent, or Firm*—Rosenberg, Klein & Lee

(57) **ABSTRACT**

A battery terminal connector includes a metal mounting base and a number of metal wire distribution holders radially extended from the periphery of the mounting base, the mounting base having a first clamping arm and a second clamping arm arranged in parallel and defining a circular mounting hole and a narrow gap in communication with the circular mounting hole for mounting on a terminal of a battery, the first clamping arm having a transverse screw hole disposed on a front extension portion thereof, the second clamping arm having a transverse through hole disposed on a front extension portion thereof and connected to the transverse screw hole of the first clamping arm by a screw bolt after coupling of the circular mounting hole to the terminal of the battery, the wire distribution holders each having one or more screw holes for the mounting of a respective screw bolt to secure a respective electric wire.

4 Claims, 7 Drawing Sheets

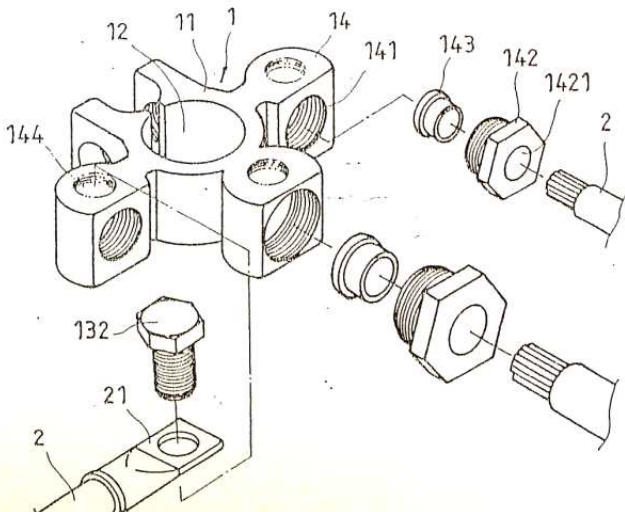


FIG. 5

